

# M321TS/M321TS-RS Thermostat

DATA SHEET

## Features:

- Large, easy-to-read 8.8-square-inch blue backlit touchscreen display
- Small elegant design
- Remote bulb sensor and 10' of cable
- Large, lighted LCD display
- Has LED indicator light
- Four programmable periods per day
- Programs for weekdays and weekends (7 Day or 5-1-1)
- Battery or System powered
- 12/24 Hr Clock Display
- Adjustable temperature differential cycle rate
- Battery free memory storage
- F/C temperature display
- Wall or electrical box mounting
- Adjustable room temperature calibration

**M321RS Includes Remote Blub (Floor) Sensor**

## Design:




## Applications:

- Space/Floor Heating
- For use with SLC500, CBX Series or Radiant 8 Control Units

## Specifications:

- Accuracy +/- 1°F (at 68°F) / +/- 1°C (at 20°C)
- Dimensions 4.7 x 3.8 x 1in (119.6 x 97.6 x 26mm)
- Temperature range 41°F to 95°F (5°C to 35°C)
- Electrical Ratings: 24V AC (18 to 30V AC), 50/60 Hz for hardwire (common wire or 2 AAA 1.5V alkaline batteries (included))

## Wiring M321TS:

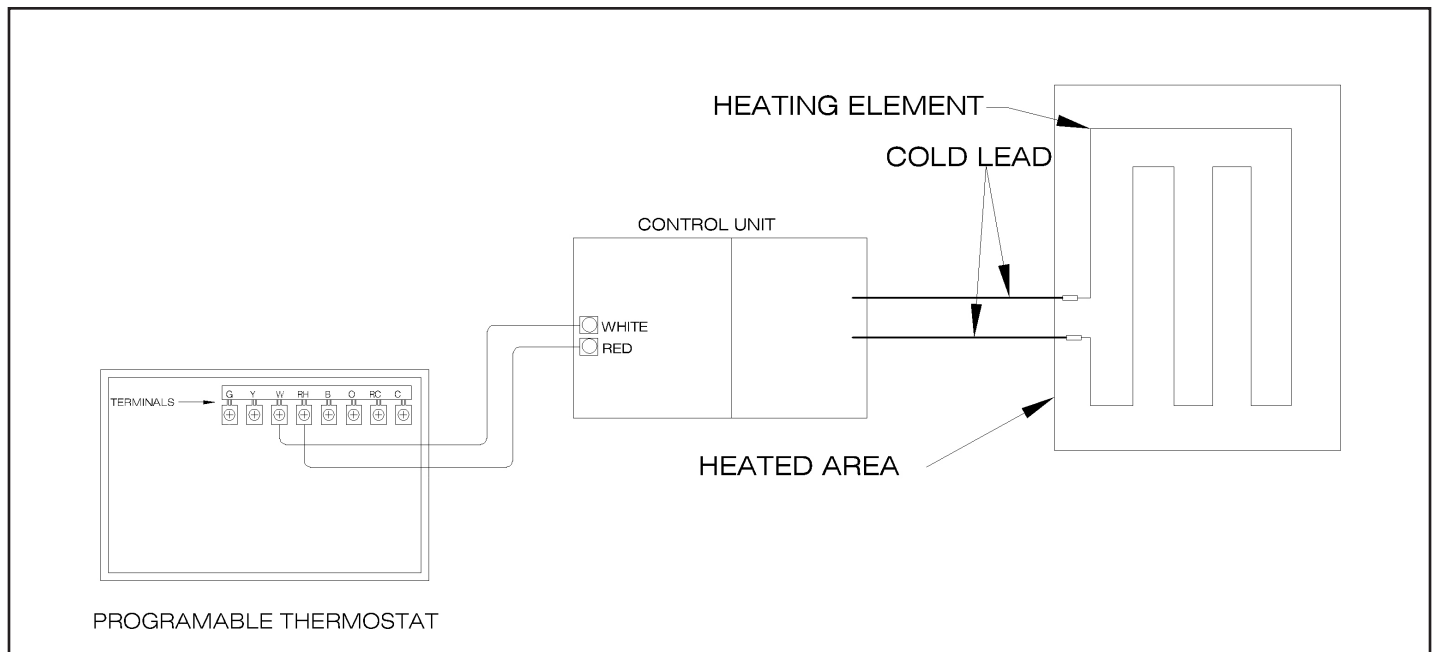

Note: Refer to the NEC or CEC for specific requirements.




**COMFORT RADIANT HEATING LLC**

9 Morris Lane, Clifton Park, NY 12065  
(888)448-0555 (518)373-5700  
www.comfortradiant.com

# M321TS/M321TS-RS Thermostat

DATA SHEET

## Wiring M321TS-RS:

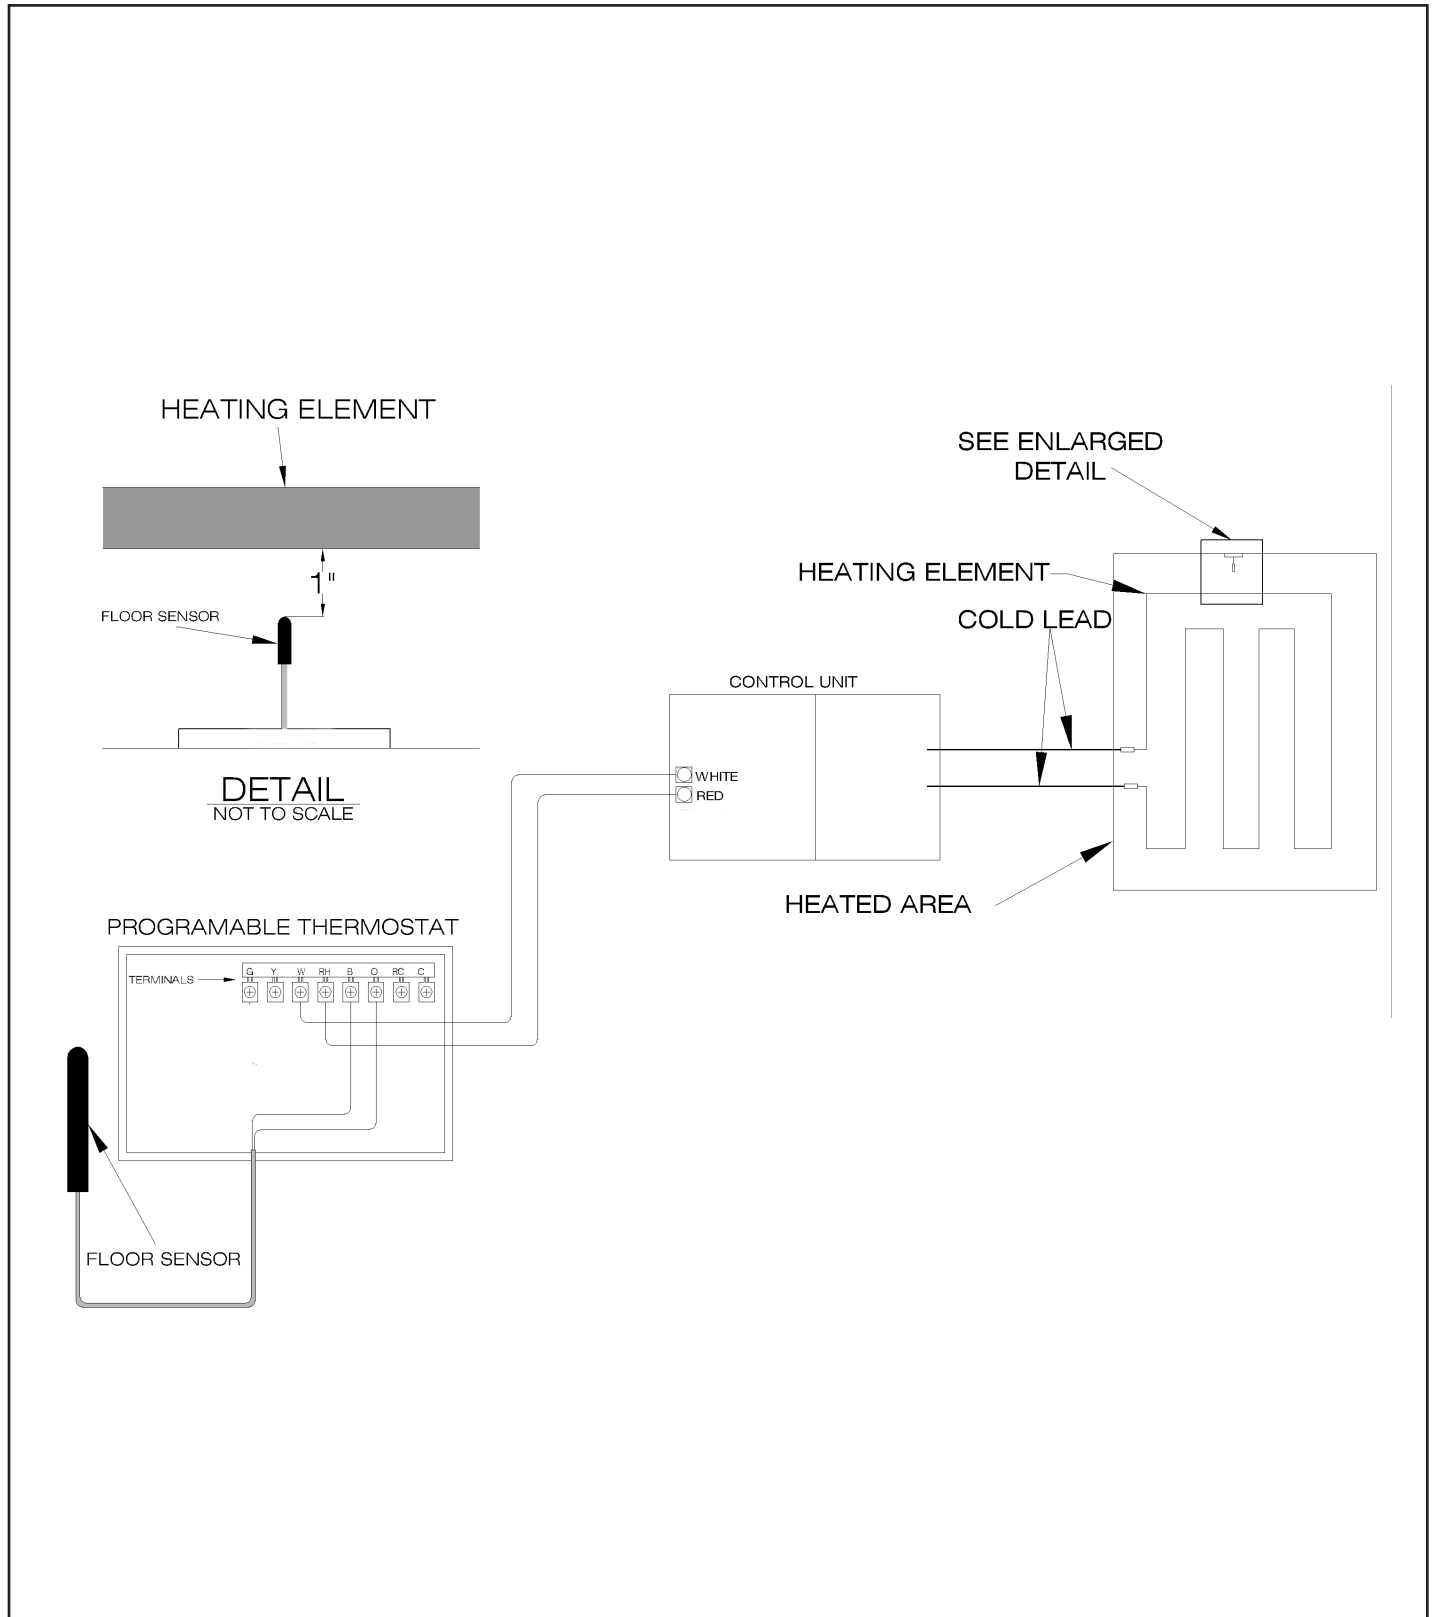

Note: Refer to the NEC or CEC for specific requirements.



**COMFORT RADIANT HEATING LLC**

9 Morris Lane, Clifton Park, NY 12065

(888)448-0555 (518)373-5700

[www.comfortradiant.com](http://www.comfortradiant.com)