

M326ARSC Ice & Snow Sensor Controller

DATA SHEET

Features:

- Activates System when moisture is detected and temperature is below set point
- 34° - 44° F : Field Selectable
- Automatic Activation means Lower De-icing Costs
- Reliable Rain and Snow Detection
- Replaceable Precipitation Sensor
- Easy Installation, Full Access to Electronics
- Adjustable Temperature Trigger
- Adjustable Delay Off Cycle, Selectable 30-90 Minutes or 2-6 Hours
- Adjustable Sensitivity Control
- Selectable Low Temperature Cutoff
- Smart "Manual On" Operates for One Delay Off Cycle
- Bright Power/Activation LED Indicator

Applications:

- For Use with SLC500, CBX Series, Radiant 8, M329, M346, M330 Series, M530 Series
- Direct Load Switching up to 30A/277VAC
- Snow Melting
- Roof Deicing
- Gutter Deicing/Melting


Design:



Specifications:

- Requires 100-277 VAC
- Full 30A @ 277 VAC Control
- Dimensions: 4 $\frac{3}{4}$ "(120) x 7"(178) x 2 $\frac{3}{4}$ "(70)
- Weight: 2 pounds
- Front cover electronics access

Wiring:

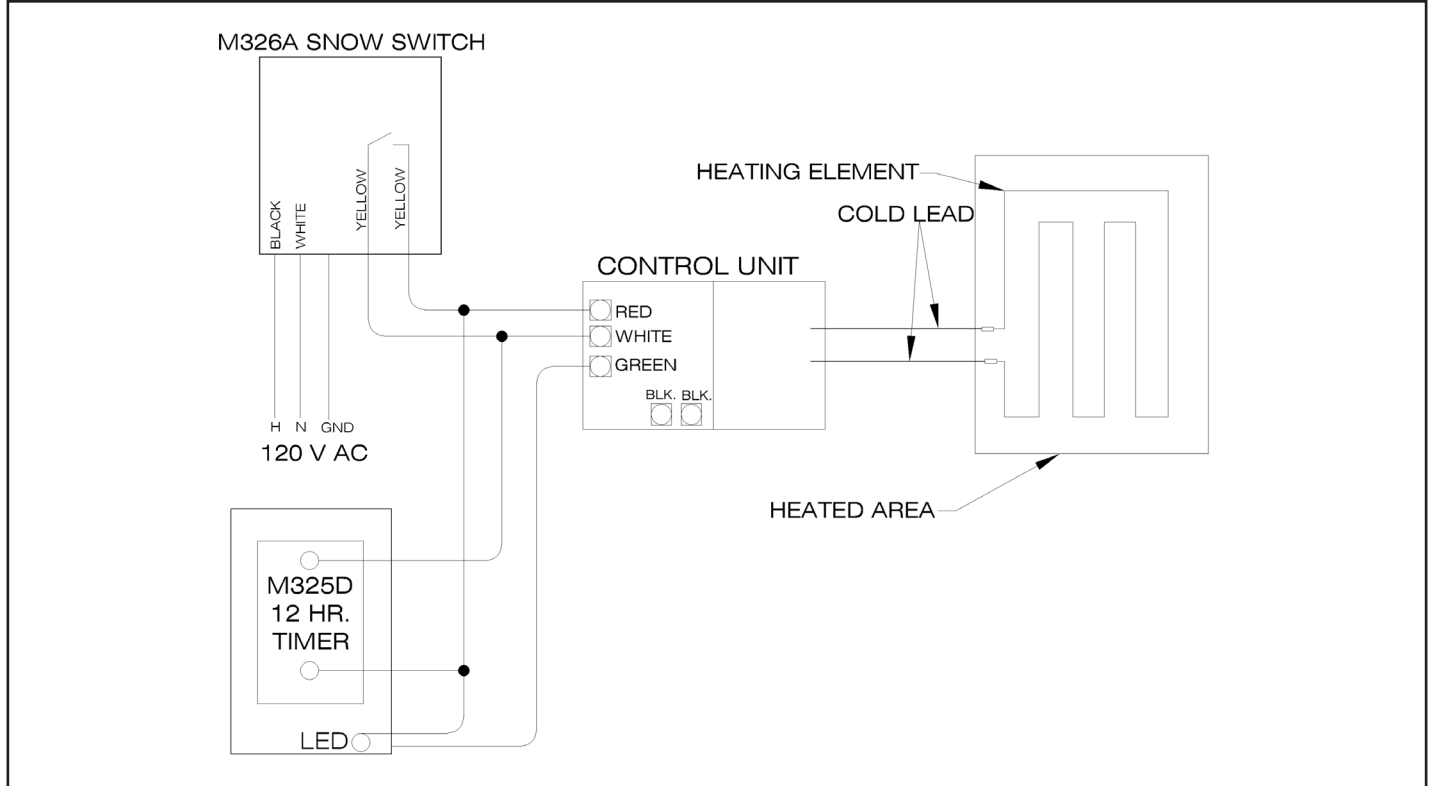

Note: Refer to the NEC or CEC for specific requirements.




COMFORT RADIANT HEATING LLC

9 Morris Lane, Clifton Park, NY 12065

(888)448-0555 (518)373-5700

www.comfortradiant.com

Wiring:

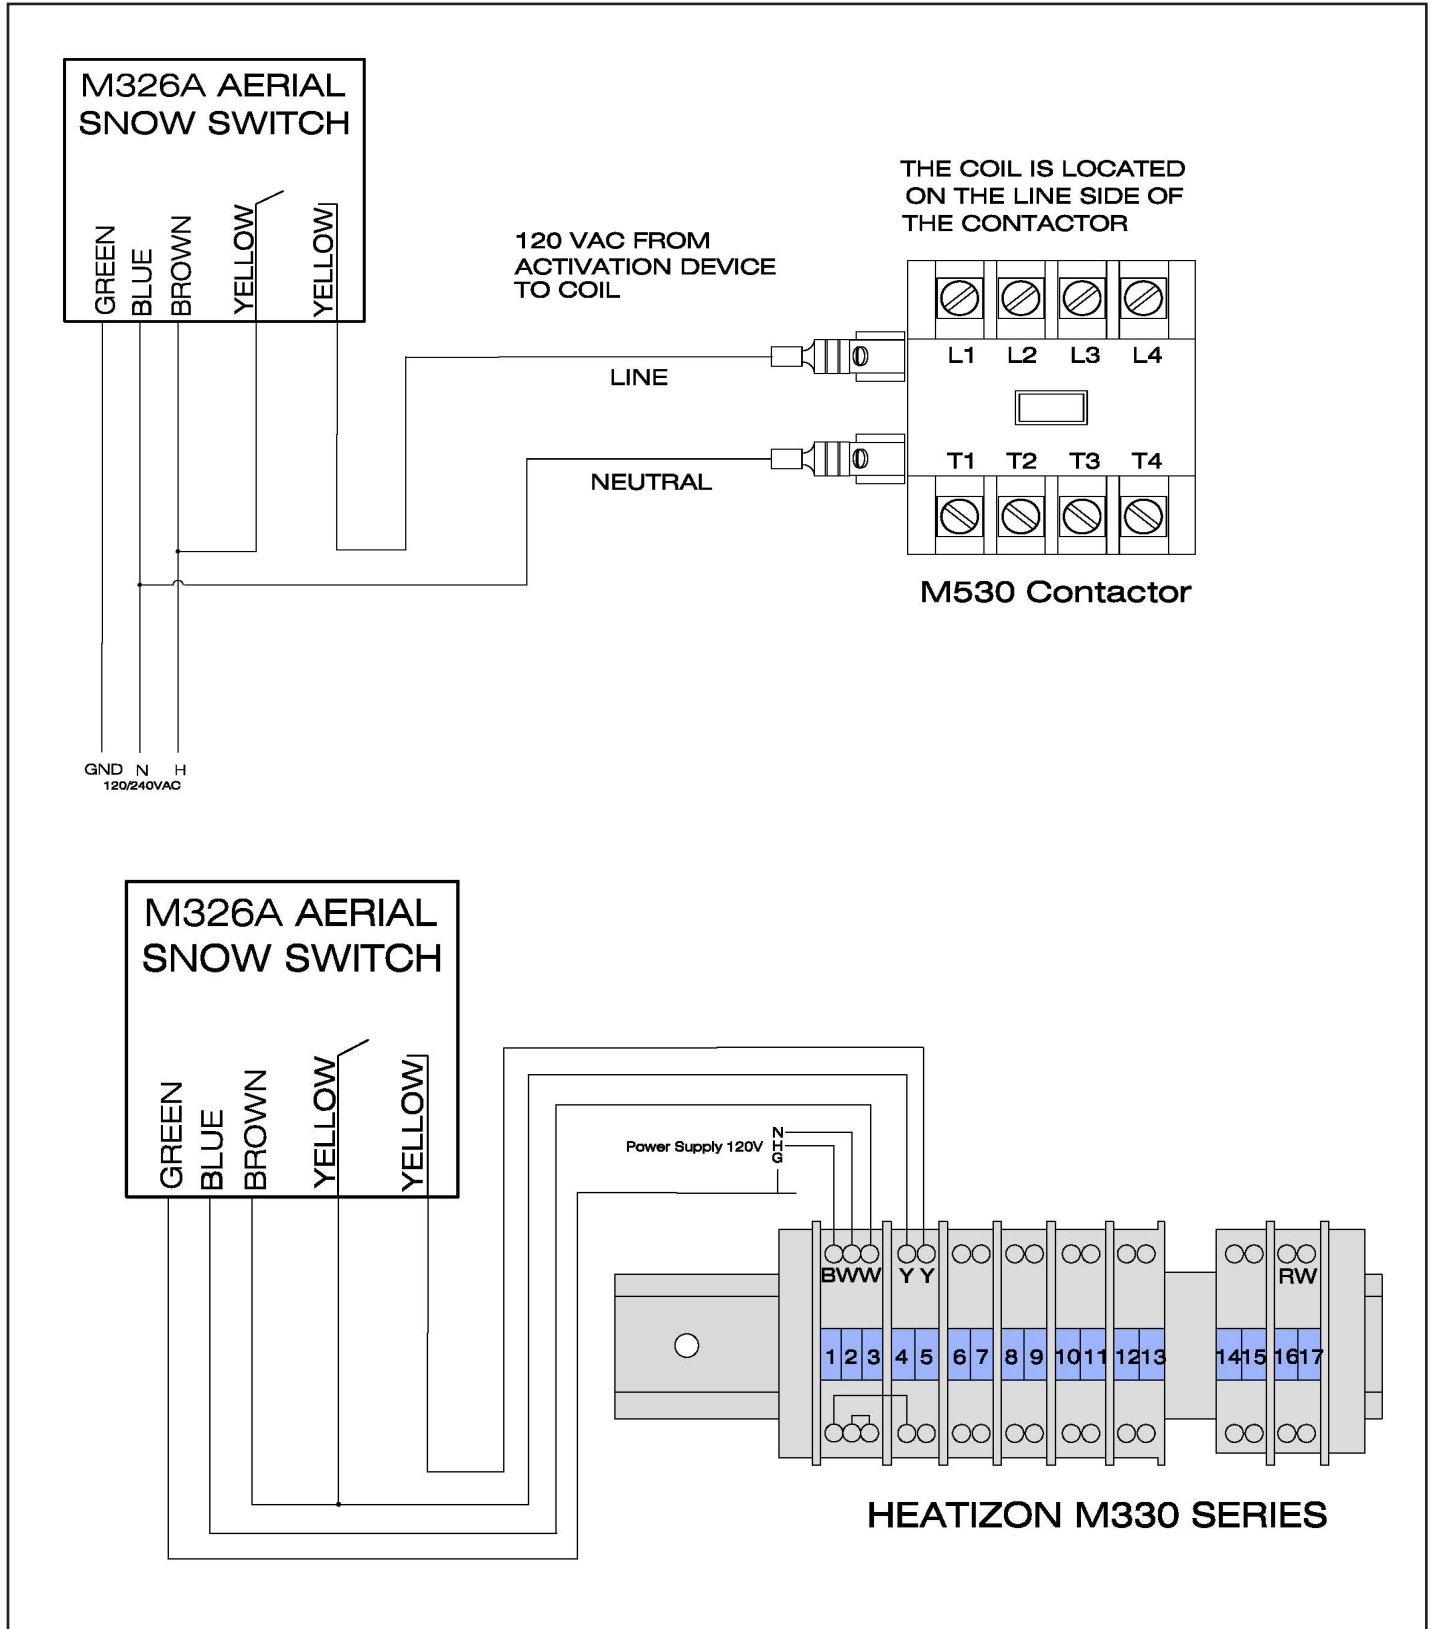

Note: Refer to the NEC or CEC for specific requirements.



COMFORT RADIANT HEATING LLC
 9 Morris Lane, Clifton Park, NY 12065
 (888)448-0555 (518)373-5700
www.comfortradiant.com