

## Features:

- Activates System when temperature is below set point
- 0° - 50° F : Temperature Selection
- 5° F Temperature Differential
- Automatic Activation for reliable system operation
- Easy Installation, Full Access to Electronics
- Adjustable Temperature Trigger
- Single Power Source
- Simple and Economical



## Specifications:

### M515:

- Switches 120/277 VAC 50/60hz
- FLA 20A @120VAC
- FLA 16A @277VAC
- Dimensions: 6" x 6"x 4"
- NEMA6P Box
- Weight: 2 pounds
- Front cover access


### M515G:

- Same as above except adds GFEP 30mA protection

## Applications:

- Direct switch for Self Regulating Cable, MI cable, and other Line Voltage Products
- Coil Switch for M330 Series, M530 Series, and Custom Panel Products
- Snow Melting
- Roof De-icing
- Gutter and Downspout De-icing
- Pipe Freeze Protection

## Wiring:

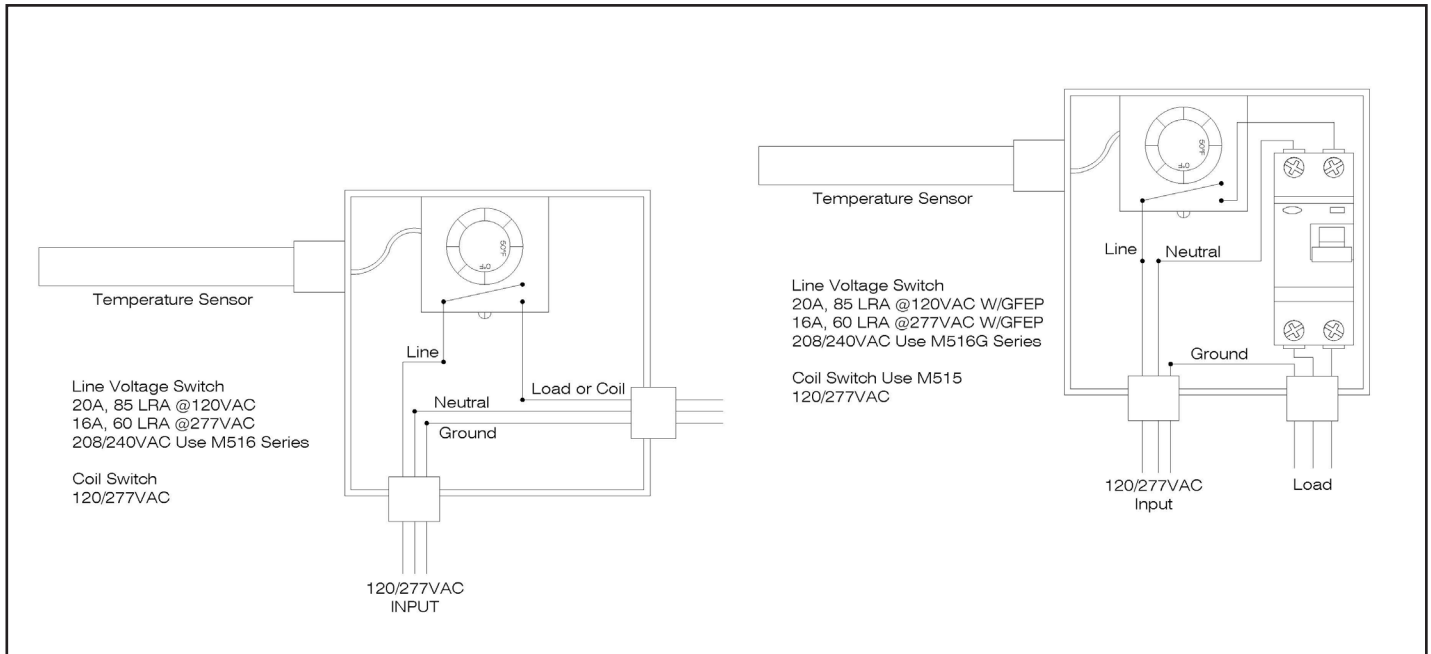

Note: Refer to the NEC or CEC for specific requirements.



## COMFORT RADIANT HEATING LLC

9 Morris Lane, Clifton Park, NY 12065

(888)448-0555 (518)373-5700

www.comfortradiant.com