

Features:

- Activates System when temperature is below set point
- 0° - 50° F : Temperature Selection
- 5° F Temperature Differential
- Automatic Activation for reliable system operation
- Easy Installation, Full Access to Electronics
- Adjustable Temperature Trigger
- Single Power Source
- Simple and Economical



Specifications:

M516:

- Switches 208/240 VAC
- 30A @208VAC
- 30A @240VAC
- Dimensions: 6" x 6" x 4"
- NEMA6P Box
- Weight: 3 pounds
- Front cover access


M516G:

- Same as above except adds GFEP 30mA protection

Applications:

- Direct switch for Self Regulating Cable, MI Cable, and other Line Voltage Products
- Coil Switch for M330 Series, M530 Series, and Custom Panel Products
- Snow Melting
- Roof De-icing
- Gutter and Downspout De-icing

Wiring:

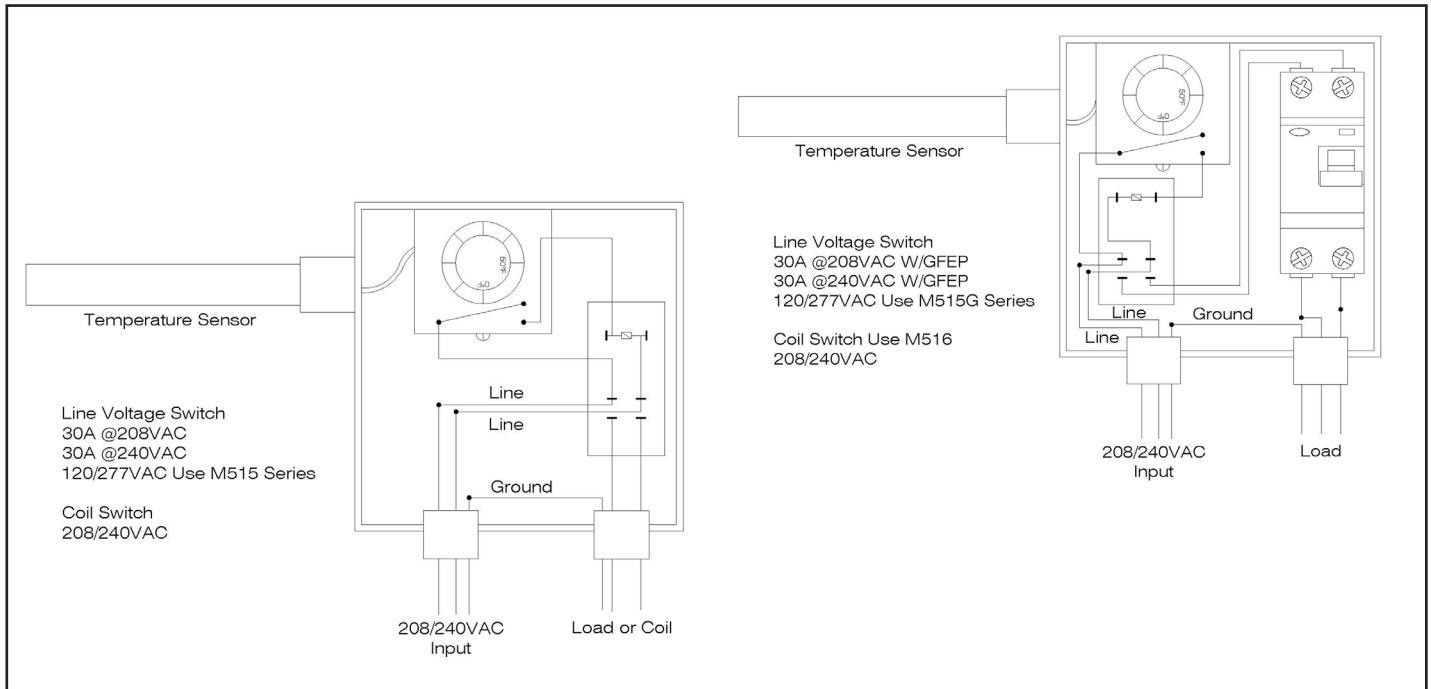

Note: Refer to the NEC or CEC for specific requirements.



COMFORT RADIANT HEATING LLC

9 Morris Lane, Clifton Park, NY 12065

(888)448-0555 (518)373-5700

www.comfortradiant.com