

M330G Relay Panel

DATA SHEET

Description:

Enclosed in an attractive powder coated metal enclosure, the M330 series Heatizon Relay Panels are designed to operate up to four line voltage heating element lengths manually, from one Heatizon Activation Device, or from a Heatizon Systems Monitor Station Selector Box (Heatizon Part No. M346).

- Powder coated enclosure with wiring diagram on the inside cover. (Other enclosures are available upon request)
- Rocker switches for manual operation.
- Easy connection of power supply and load for up to four circuits.

Design:



Specifications:

- Requires 120V, Switches 120/208/240/277 VAC
- Dimensions: 18" x 12" x 5"
- Weight: 17 lbs

Applications:

- Snow Melting
- Roof Deicing
- Floor Warming
- Space Heating
- Pipe Freeze Protection


Features:

- Contains four relays
- Master rocker switch, and four auto/manual rocker switches
- Power and status LED's on Ground Fault Sensor
- Accepts up to four 30AMP Line Voltage Circuits
- Compatible with Heatizon supplied 120VAC activation devices and the M346 Monitor Station
- Available in various types of enclosures

Three Ground Fault set points:

- 5mA - detects sensitive ground fault conditions that may be injurious to people
- 10mA and 30mA - to help eliminate nuisance tripping while providing ground fault equipment protection

Wiring:

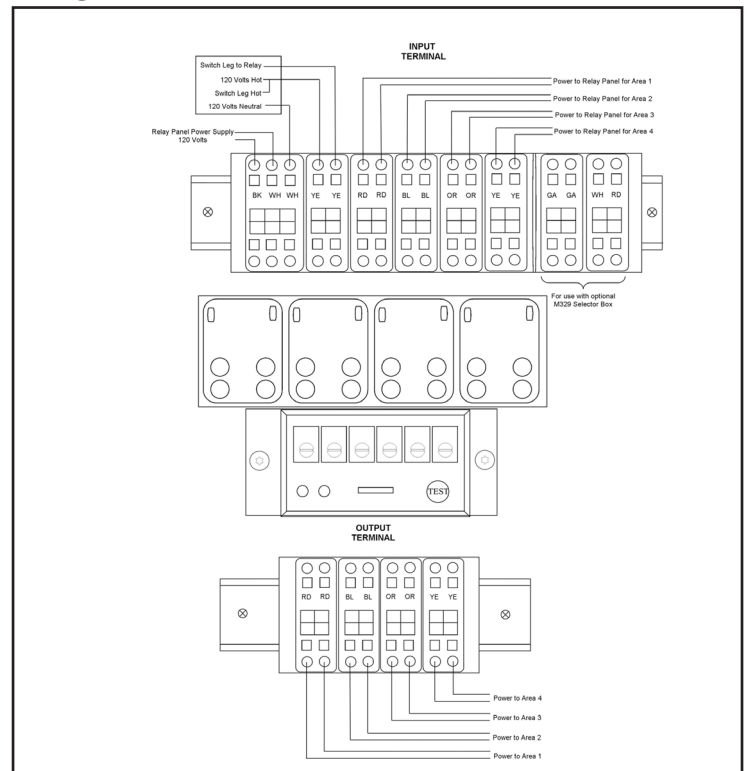

Note: Refer to the NEC or CEC for specific requirements.



COMFORT RADIANT HEATING LLC

9 Morris Lane, Clifton Park, NY 12065

(888)448-0555 (518)373-5700

www.comfortradiant.com